
# CROSSCUT POWER SAW SERIES

Original Saw Company designed the Crosscut Power Saw line to enhance safety during repetitive cutting. This model limits access to the saw blade and controls dust in the cutting area. It also integrates manual and pneumatic clamping systems to secure material. The Crosscut Power Saw is ideal for pallet shops, lumber yards, schools, big box stores, and any setting where repetitive cuts are required.

Manual Models (3710.M, 3715.M, 3720.M, 3725.M): These models are simple and easy to use, featuring a pull handle on the right side. Pulling the handle moves the carriage forward to cut the material, making the blade visible only when used. Releasing the handle returns the carriage to its home position under the machine shroud.

Semi-Automatic Models (3710.S, 3715.S, 3720.S, 3725.S): Semi-Automatic models have a smooth-running belt-drive system powered by a DC motor and controlled by a drive unit. The operator clamps the material manually or pneumatically, and the cutting process starts by pushing a button. The blade becomes visible only when the semi-automatic cycle is activated. The carriage stroke is adjustable with stops on the right side of the machine, ensuring the blade travels only the necessary distance, saving time and reducing wait periods.

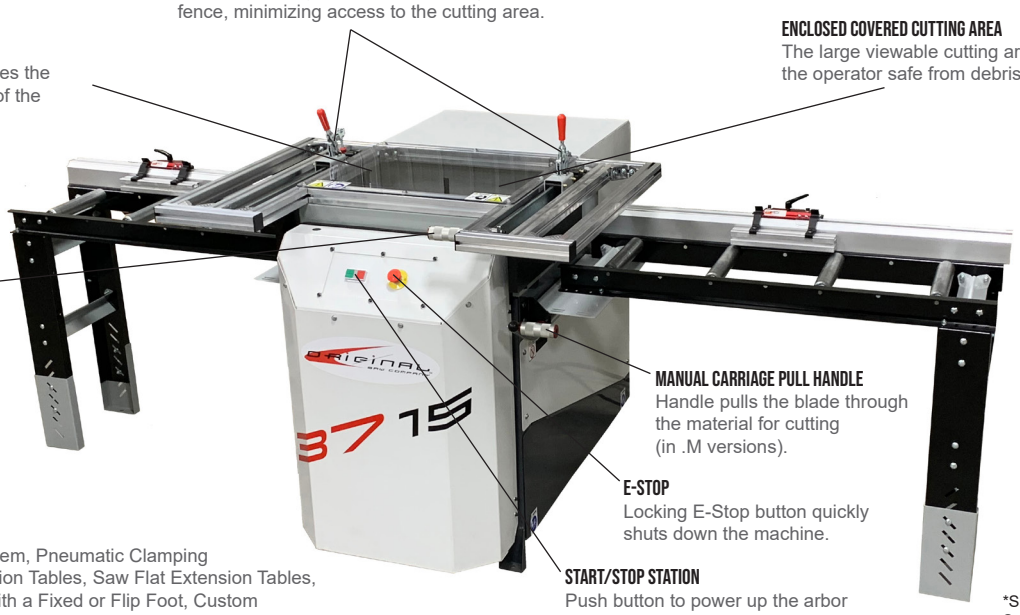


**OPTIONAL ACCESSORIES INCLUDE:**
Digital Keypad Access System, Pneumatic Clamping System, Saw Roller Extension Tables, Saw Flat Extension Tables, Saw Measuring Systems with a Fixed or Flip Foot, Custom Clamping, Saw Blades, Keyed E-stop for Limiting Usage

*Shown with optional Saw Roller Extension Table.

| Model | 3710.M | 3710.S | 3715.M | 3715.S | 3720.M | 3720.S | 3725.M | 3725.S |
|---|---|---|---|---|---|---|---|---|
| Blade Size | 14" 356mm | 14" 356mm | 14" 356mm | 14" 356mm | 16" 406mm | 16" 406mm | 20" 508mm | 20" 508mm |
| Arbor Motor HP | 3 | 3 | 3 | 3 | 5 | 5 | 7.5 | 7.5 |
| Input Phase | 1 | 1 | 3 | 3 | 3 | 3 | 3 | 3 |
| Input Voltage | 208/230V | 208/230V | 208/230 460/575V | 208/230 460/575V | 208/230 460/575V | 208/230 460/575V | 208/230 460/575V | 208/230 460/575V |
| Amps (Rated) | 17 | 17 | 8.5/8/4 | 8.5/8/4 | 14.4/13/6.5 | 14.4/13/6.5 | 19/9.5 | 19/9.5 |
| Brake | Automatic | Automatic | Automatic | Automatic | Automatic | Automatic | Automatic | Automatic |
| Arbor | 1" | 1" | 1" | 1" | 1" | 1" | 1" | 1" |
| Carriage Drive | Manual | Semi-Auto DC Drive | Manual | Semi-Auto DC Drive | Manual | Semi-Auto DC Drive | Manual | Semi-Auto DC Drive |
| Capacities: inches/metric | | | | | | | | |
| Crosscut Cap. at 1" | 17 ¼" 438mm | 17 ¼" 438mm | 17 ¼" 438mm | 17 ¼" 438mm | 18" 457mm | 18" 457mm | 18" 457mm | 18" 457mm |
| Depth of Cut | 3 ¼" 83mm | 3 ¼" 83mm | 3 ¼" 83mm | 3 ¼" 83mm | 4 ¼" 108mm | 4 ¼" 108mm | 6 ⅜" 162mm | 6 ⅜" 162mm |